



Access



Video



Software



Technology



## Performa® Series Proximity Plus® Cards and Key Tags

**Globally accepted 13.56 MHz operating frequency**

**Compatibility with Sielox's Performa® readers**

**Pre-programmed customer-specific ID numbers**

**Available in clamshell, graphics-quality direct print or Key Tag**

### AC-12 Series

Sielox's Performa® Proximity Plus® cards set the standard for performance and cost-effective solutions for access control. Utilizing the globally accepted frequency of 13.56 MHz ensures compatibility with Sielox's Performa® readers.

Sielox's innovative flipchip assembly design provides for the highest reliability proximity cards available. Performa Proximity Plus cards utilize a passive, no-battery design allowing for an infinite number of reads.



**Clamshell**



**Graphics Quality  
Direct Print**



**Key Tag**

## Product Specifications

### Typical Read Range

Up to 5" with Performa® Proximity Switch Plate Reader (13 cm)


Up to 4" with Performa® Proximity Mullion Mount Reader (10 cm)

### Operating Temperatures

-4°F to + 158°F  
20°C to + 70°C

### Model Numbers

AC-12 (Clamshell)  
AC-12P (Graphics-Quality Direct Print)  
AC-12M (Graphics-Quality Direct Print w/Magnetic Stripe)  
AC-12T (Key Tag)

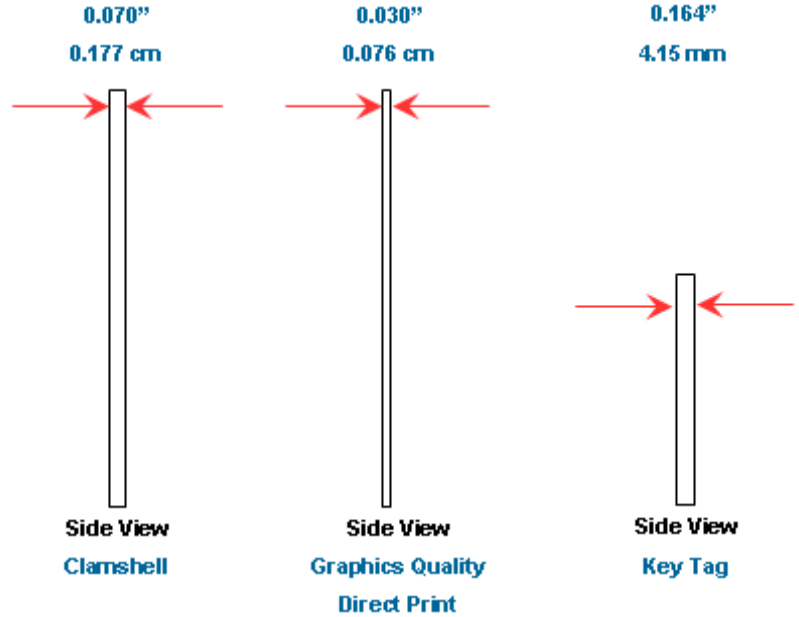

2.12"  
54.04 mm  
Clamshell



2.12"  
54.04 mm  
Graphics Quality  
Direct Print

Also available with  
Magnetic Stripe



1.25"  
3.17 mm  
Key Tag

3.37"  
8.55 mm

1.58"  
4.01 mm